


Note:  
Conduit, drain tubes and cap  
may be galvanized steel or PVC.

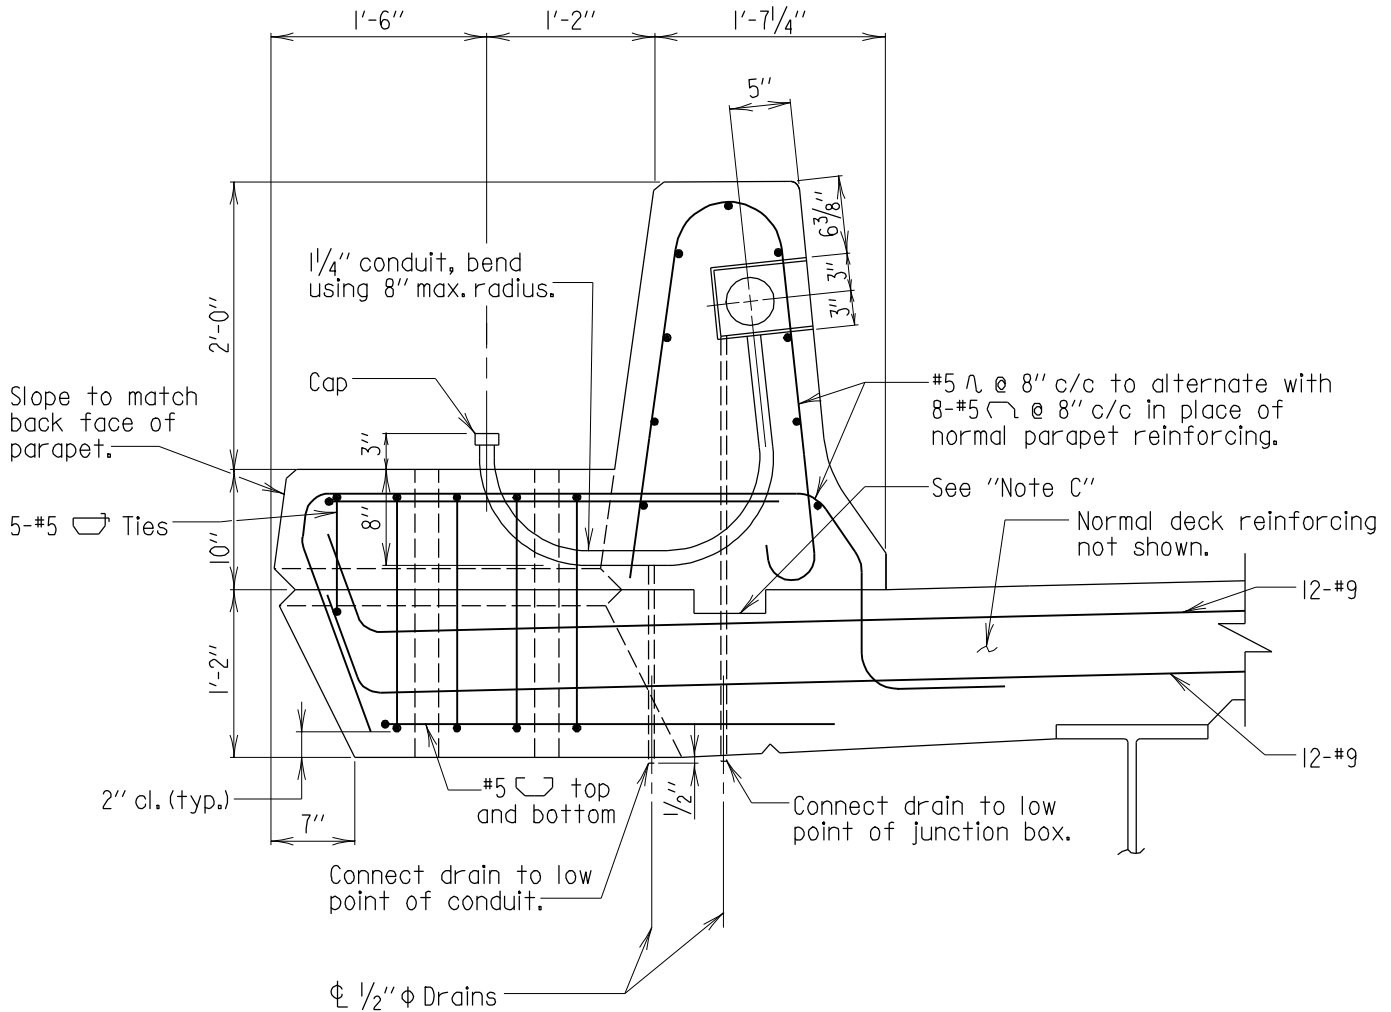

SECTION B-B  
Scale: 3/4"=1'-0"

Note:  
All longitudinal bars are #5's and shall be placed continuously in the parapet from expansion opening to expansion opening in a simple span bridge and expansion opening to centerline of pier in a multispan bridge. Refer to BR-SS(6.25)-03-159A.

Note C:  
The constr. jt. between the F-shape parapet and the deck may vary slightly from the joint indicated. For exact details and location of the joint see "Superstructure" Sheet.

## 34" DIAMOND BACK

APPROVAL	
<i>L. S. Friedman</i>	DIRECTOR
OFFICE OF BRIDGE DEVELOPMENT	
DATE: 11/8/84	
REVISIONS	
SHA	FHWA
8-5-92	.
1-8-93	.
9-24-96	.
FHWA APPROVAL	DATE: 3-19-85
6-1-05	.

STATE OF MARYLAND  
DEPARTMENT OF TRANSPORTATION  
STATE HIGHWAY ADMINISTRATION  
OFFICE OF BRIDGE DEVELOPMENT

SUPPORT BRACKET FOR BRIDGE MOUNTED LIGHT POST  
WITH SINGLE CONDUIT AND 34" F-SHAPE PARAPET  
WITH DIAMOND BACK

STANDARD NO. BR-SS(6.28)-05-167A

SHEET 2 OF 2